


INSTALLATION MANUAL FOR ROOF CERAMIC TILE MOUNTING SYSTEM

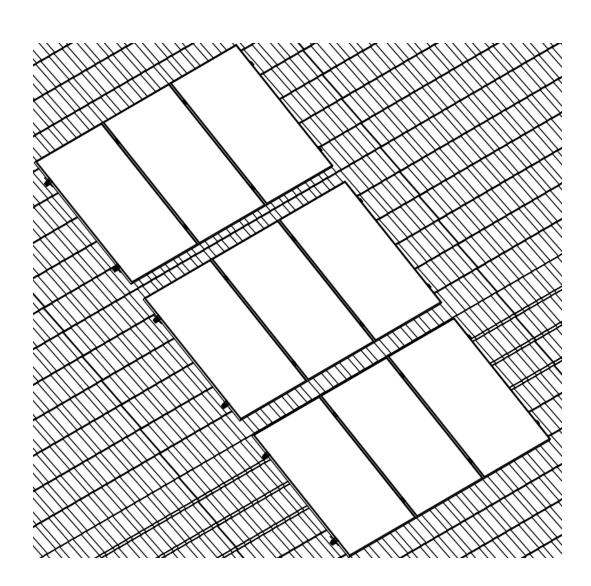

The mounting system described below is used to mount photovoltaic modules on pitched roof.

During production every effort was made to provide you with a product of the highest quality which is also easy to mount. This instruction is a set of rules for the correct mounting of the mounting structure components, but is not a blueprint or a substitute for it. The installer performing the mounting must be properly trained and licensed for the job. Overall responsibility for proper mounting rests with the installer who should select the appropriate type of construction.

In situations where the strength of the roof structure is questionable, a structural engineer should be consulted to perform strength calculations for the roof.

1. The layout of the modules shall be arranged to minimize or preclude the appearance of shadow on the modules. Keep in mind that even the shadow cast by trees or buildings can limit the yields generated by modules. When mounting the system in summer, be aware that the shadow cast by trees and neighboring buildings will reach much further in winter. Also remember to keep the safe zone on the roof sheathing - figure 1

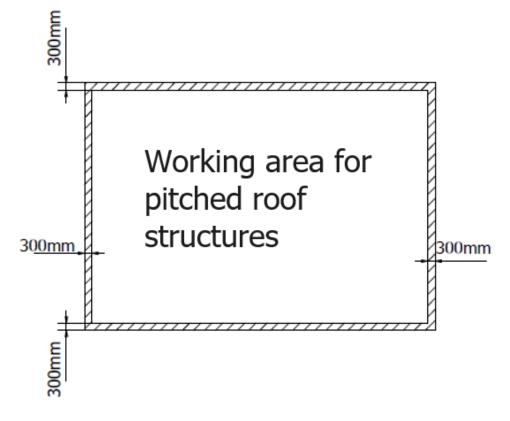


FIGURE. 1 Working area for pitched roof structures



WWW.B2B.KENO-ENERGY.COM

- 2. The length of one row of modules can be calculated using the two formulas described below.
 - a. Formula for row mounted on short side:

ROW LENGTH = NUMBER OF MODULES IN THE ROW * MODULE + 20mm) + 60mm

ROW LENGTH = (MODULE LENGHT + 20) * NUMBER OF MODULES + 60

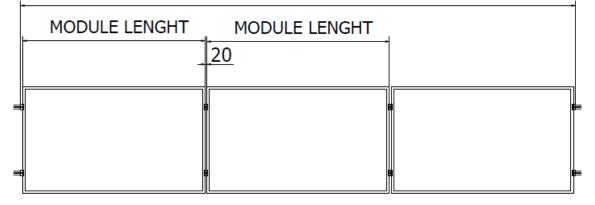


FIGURE. 2 Construction row length for short side mounted modules.

b. Formula for a row mounted on the long side:

ROW LENGTH = NUMBER OF MODULES IN THE ROW * MODULE + 20mm) + 60mm

ROW LENGTH = (MODULE WIDTH + 20) * NUMBER OF MODULES + 60

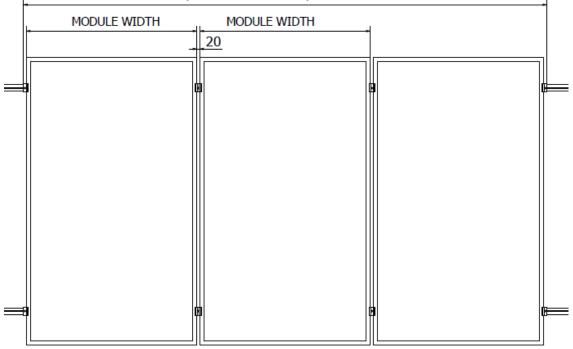


FIGURE. 3 Length of the row of structures mounted on the long side



- **3.** The spacing between each mounting point depends on the mounting profile selected and how the module is mounted to the bracket. The maximum between brackets is recorded in Table 1 and Table 2.
 - a. For long side mounting

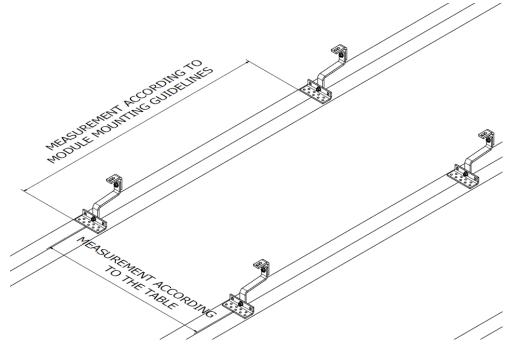


FIGURE. 4 Bracket spacing

Tab.1 Maximum spacing of	brackets
--------------------------	----------

Module length	K-01	K-25
1780mm	1,2 [m]	1,2 [m]
2275mm	1,1 [m]	1,1 [m]



b. For mounting on the short side

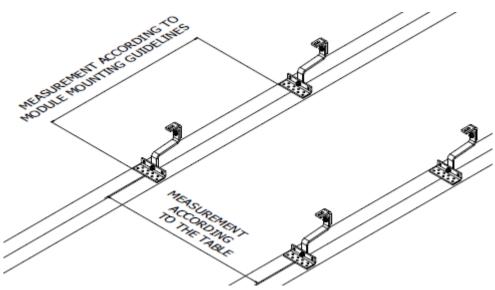


FIGURE. 5 Bracket spacing

I able 2 Maximum spacing of brackets			
Module length	K-01	K-25	
1780mm	1,2 [m]	1,2 [m]	
2275mm	1,1 [m]	1,1 [m]	

Table 2 Maximum spacing of brackets



4. The First, remove the tiles at the bracket locations. Removing the tiles will allow access to the rafters. Then you need to sand the tile locks so that the installed hook does not rest on the tiles. Place the mounting bracket against the rafters and attach it with a minimum of two K-16 screws of the appropriate length (no pre-drilling).

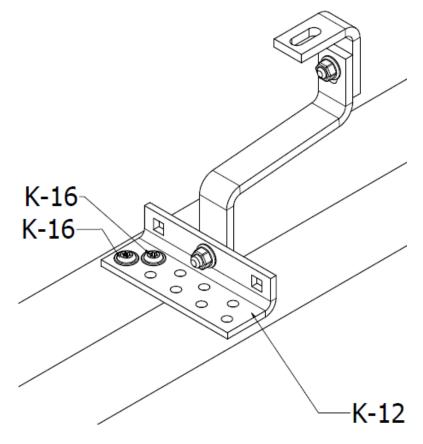


FIGURE. 6 Mounting of the bracket to the rafters



5. After mounting the brackets, prepare the mounting profiles by connecting them to the appropriate length using the K-02 connectors placed at the ends of two adjacent profiles. Bolt theconnector together using two K-19 "T" bolts. Profiles can be cut to the required

ATTENTION: The minimum useful length of the profile in the construction is 500mm.

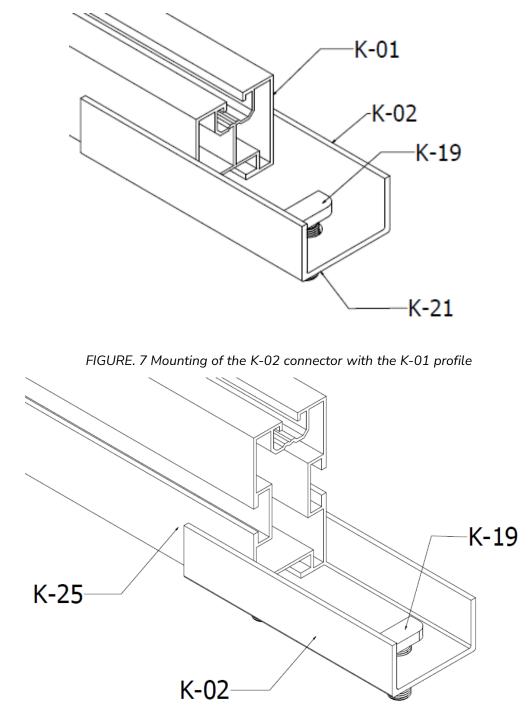


FIGURE. 8 Mounting of the K-02 connector with the K-25 profile



WWW.B2B.KENO-ENERGY.COM

WWW.KENO-ENERGY.COM

6. The prepared profiles should be attached to the installed hooks using "T" bolts. The heads of the bolts must go into a specially designed channel through the bean type holes in themounting bracket.

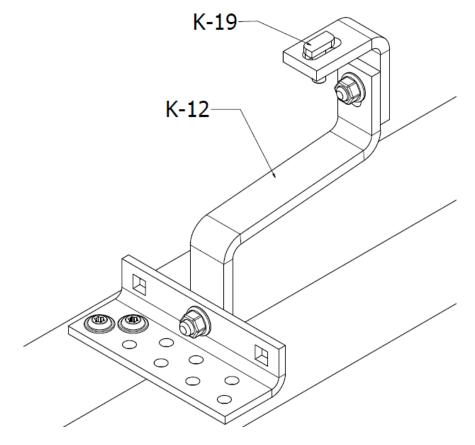


FIGURE. 9 Mounting of "T" bolts

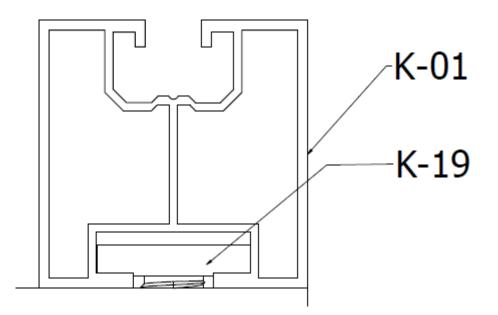


FIGURE. 10 Mounting of profile K-01



WWW.B2B.KENO-ENERGY.COM

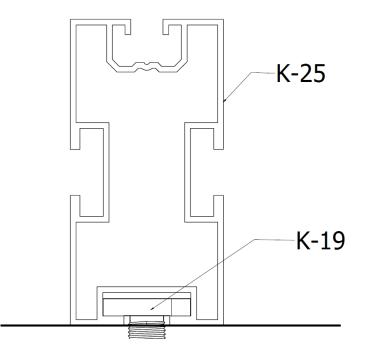


FIGURE. 11 Mounting of profile K-25

7. Thread the K-21 nuts onto the protruding threads from the K-19 bolts.

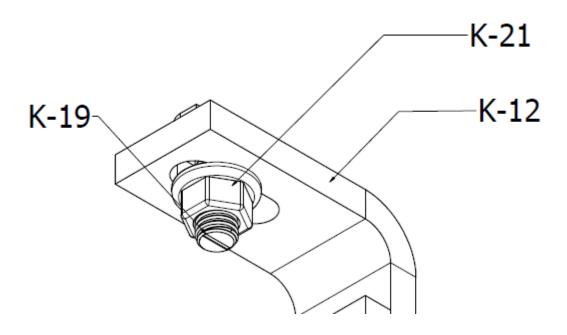


FIGURE. 12 Mounting of "T" bolts



WWW.B2B.KENO-ENERGY.COM

- 8. The prepared structure should be bolted together with a torque of 30Nm
- **9.** The K-04 t-slot nut can be mounted to the so prepared structure in a specially prepared channel. It can be mounted in any desired location

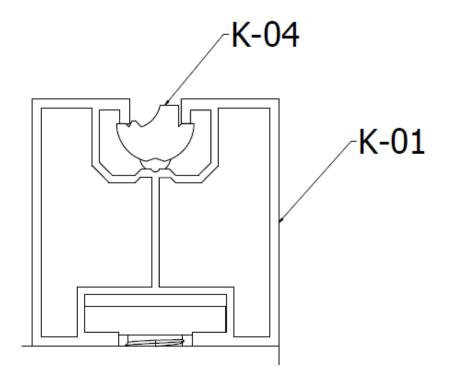


FIGURE. 13 Mounting of the K-04 nut to K-01 profiles




FIGURE. 14 Mounting of the K-04 nut to K-01 profiles



10. Then insert the K-06 end clamps into the first beam with the K-18 allen bolts. The first from the edge and the last from the edge will always be the end clamp, stabilizing the edge of the first and last module in a row. The mid clamps, on the other hand, will simultaneously stabilize the sides of the two modules. Properly selected edge clamps will have a height equal to the module thickness, the allen bolts will be 10mm shorter than the module thickness, and the mid clamps are universal and fit any module thickness

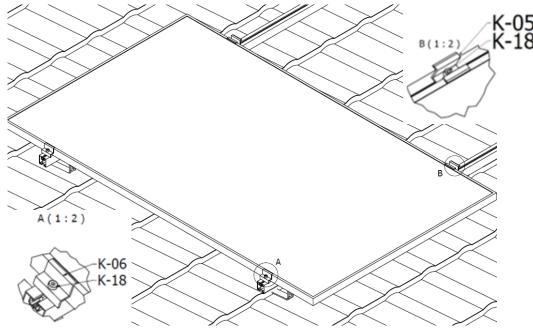


FIGURE. 15 Mounting of the modules and mounting the K-05 and K-06 clamps

11. Tighten clamps to a torque of 18Nm.




FIGURE. 16 View of assembled structure with modules

Thank you for using KENO Sp z o.o. construction

v. 09.01.2023



WWW.B2B.KENO-ENERGY.COM

WWW.KENO-ENERGY.COM