



- DESIGN: MODULAR
- DEGREE OF PROTECTION: IP65
- YEARS OF WARRANTY: 5
- UV RESISTANCE: YES
- READY TO CONNECT: YES
- WEIGHT: 4.700 KG



The connection panel from the Polish manufacturer KENO is intended for supplying power to photovoltaic inverters., Protections against short circuits and overloads., It provides overcurrent protection on the direct current side., It also ensures protection against the effects and direct on the alternating and direct current sides. The distribution board should be used in grounded and isolated photovoltaic installations. Due to the high degree of IP protection, outdoor installation is possible. The design of the switchgear is intended for surface mounting. Depending on the equipment, switchboards can perform various functions.

BASIC PARAMETERS DC SIDE

| | |
|---|---------------------|
| Number of inputs PV string outputs | 2 2 |
| Quantity Type of DC surge arrester Type | 2 Phoenix T1/T2 |
| Overcurrent protection | 4 x 15A gPV |
| Connection type | Array MC4 Stäubli |

BASIC PARAMETERS AC SIDE

| | |
|-----------------------------|---------------|
| AC Surge Protector Type | Noark T1/T2 |
| Overcurrent circuit breaker | Noark B16A 3F |

ELECTRICAL AND MECHANICAL PARAMETERS OF THE HOUSING

| | |
|--|--------------------------|
| Model | PHS 24 T |
| Number of fields | 24 |
| Dimensions of housing without chokes and MC4 (Length Width Height) | 120.00 128.00 201.00 |
| Design in accordance with | EN 60670-1, EN 62208 |

| | |
|--------------------------------|---------------------|
| Level of security | IP65 |
| Protection class | II |
| Rated insulation voltage U_i | 400 V AC, 1500 V DC |
| The incandescent rod test | 650°C |
| Impact resistance | IK08 |
| UV resistance | YES |
| Recyclable plastic | bezhalogenowy |
| Working temperature | -25°C - +60°C |

DC surge arrester used (SPD)


| | |
|---|-----------------------------------|
| Manufacturer / Model | PHOENIX/VAL-MS-T1/T21000DC-PV/2+V |
| Surge protection | T1 / T2 |
| Idle voltage U_{OCSTC} | ≤ 975 V DC |
| Maximum discharge current I_{max} (8/20) μs | 40 kA |
| Response time t_A | ≤ 25 ns |
| Testing lightning current (10/350) μs , ładunek | 2,5 As |
| Testing lightning current (10/350) μs , energia specyficzna | 6,25 kJ/Ω |
| Test lightning current (10/350) μs , wartość szczytowa I_{imp} | 5 kA |
| Total current discharged I_{total} (8/20) μs | 40 kA |
| Total current discharged I_{total} (10/350) μs | 5 kA |
| Insulation resistance R_{iso} | > 5 GΩ (by 500 V DC) |
| Nominal discharge current I_n (8/20) μs | 15 kA |
| Rated load current I_L | 80 A |
| Long-term operating current I_{CPV} | < 20 μA |
| Maximum permanent voltage U_{CPV} | 1170 V DC |
| Short circuit resistant I_{SCPV} | 2000 A |
| Residual voltage U_{res} | $\leq 3,5$ kV (by I_n) |
| - | $\leq 2,9$ kV (by 5 kA) |
| - | $\leq 3,2$ kV (by 10 kA) |
| - | $\leq 3,7$ kV (by 20 kA) |
| - | $\leq 4,1$ kV (by 30 kA) |
| - | $\leq 4,6$ kV (by 40 kA) |
| Current of the protective conductor I_{PE} | ≤ 20 μA DC |
| - | ≤ 350 μA AC |
| Protection level U_p | $\leq 3,5$ kV |

Power consumption in standby mode P_c

≤ 25 mVA

Connection configuration

Configuration Y



Overcurrent circuit breaker used (MCB) (1)

| | |
|---|--------------------------------|
| Manufacturer / Model | Noark / Ex9BN 3P B16 |
| Rated current | 16A; 3-F |
| Rated operational voltage U_e | 230/415 V AC |
| - | 72 V DC to the pole (1P, 2P) |
| - | 48 V DC to the pole (3P, 4P) |
| Minimum voltage | 12 V AC/DC |
| Rated impulse withstand voltage U_{imp} in accordance with IEC 60898-1 | 6 kV |
| Rated impulse withstand voltage U_{imp} in accordance with IEC 60947-2 | 6 kV |
| Rated short-circuit breaking capacity I_{cn} in accordance with IEC 60898-1 | 6 kA |
| Rated short-circuit breaking capacity I_{cn} in accordance with IEC 60947-2 | 10 kA |
| Rated voltage of the insulation U_i | 690 V AC |
| Number of poles | 3 |
| Frequency | 50/60 Hz |
| Characteristic | B |
| Design in accordance with | IEC/EN 60898-1, IEC/EN 60947-2 |
| Mechanical durability | 20 000 connections |
| Electrical durability | 10 000 connections |
| Energy limitation class | 3 |
| Category of use | A |
| Feed direction | Any (top or bottom) |

Overvoltage limiter used AC (SPD)

| | | |
|----------------------|-----------------------------|------|
| Manufacturer / Model | Noark Ex9UE1+2 12.5 3PN 275 | |
| Connection | L-N/PE | N-PE |

Made in accordance with

EN 61643-11

Type of delimiter

Typee 1+2 (klasa I+II, B+C, T1+T2)

Making the insert

MOV (Warystor)GDT (Iskiernik)

Rated voltage U_n

230 V AC

Reference test voltage U_{REF}

255 V AC

Continuous working voltage U_c

275 V AC

255 V AC

Frequency f

25 kA to the pole

50 kA to the pole

Specific energy W/R

156.25 kJ/ Ω

Maximum impulse current I_{imp} (10/350 μ s)

12.5 kA to the pole

50 kA to the pole

Maximum discharge current I_{max} (8/20 μ s)

50 kA to the pole

Voltage protection level U_p for electricity I_n

1.5 kV

1.5 kV

Voltage protection level U_p for electricity I_{max}

1.8 kV

1.5 kV

Voltage protection level U_p dla 5 kA (8/20 μ s)

1 kV

-

N-PE Follow current extinguishing capability I_{fi}

-

100 A

5 s

335 V

335 V

200 ms

335 V

1200 V

Residual current I_{PE} by U_{REF}

≤ 1 mA

-

Limiter voltage for current 1mA

387 - 473 V

Response time

≤ 25 ns

≤ 100 ns

Maximum fuse protection

160 A gG

-

Ability to withstand short-circuit current

50kA

-

Short-circuit withstand I_{SCCR}

10kA

-


Current factor k

1kA

-

Type of system LV

TN-S, TT (3+1)

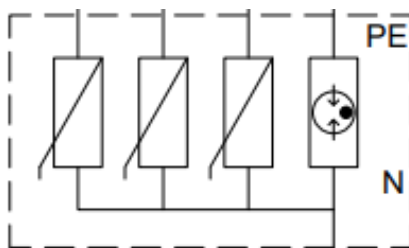

Overcurrent protection applied gPV DC

Model

10X38 1000V gPV 15A

Characteristic

gPV

Rated current

15A

Rated voltage

1000V DC

fuse

10,3 x 38 mm